



DLS Hardware Configuration

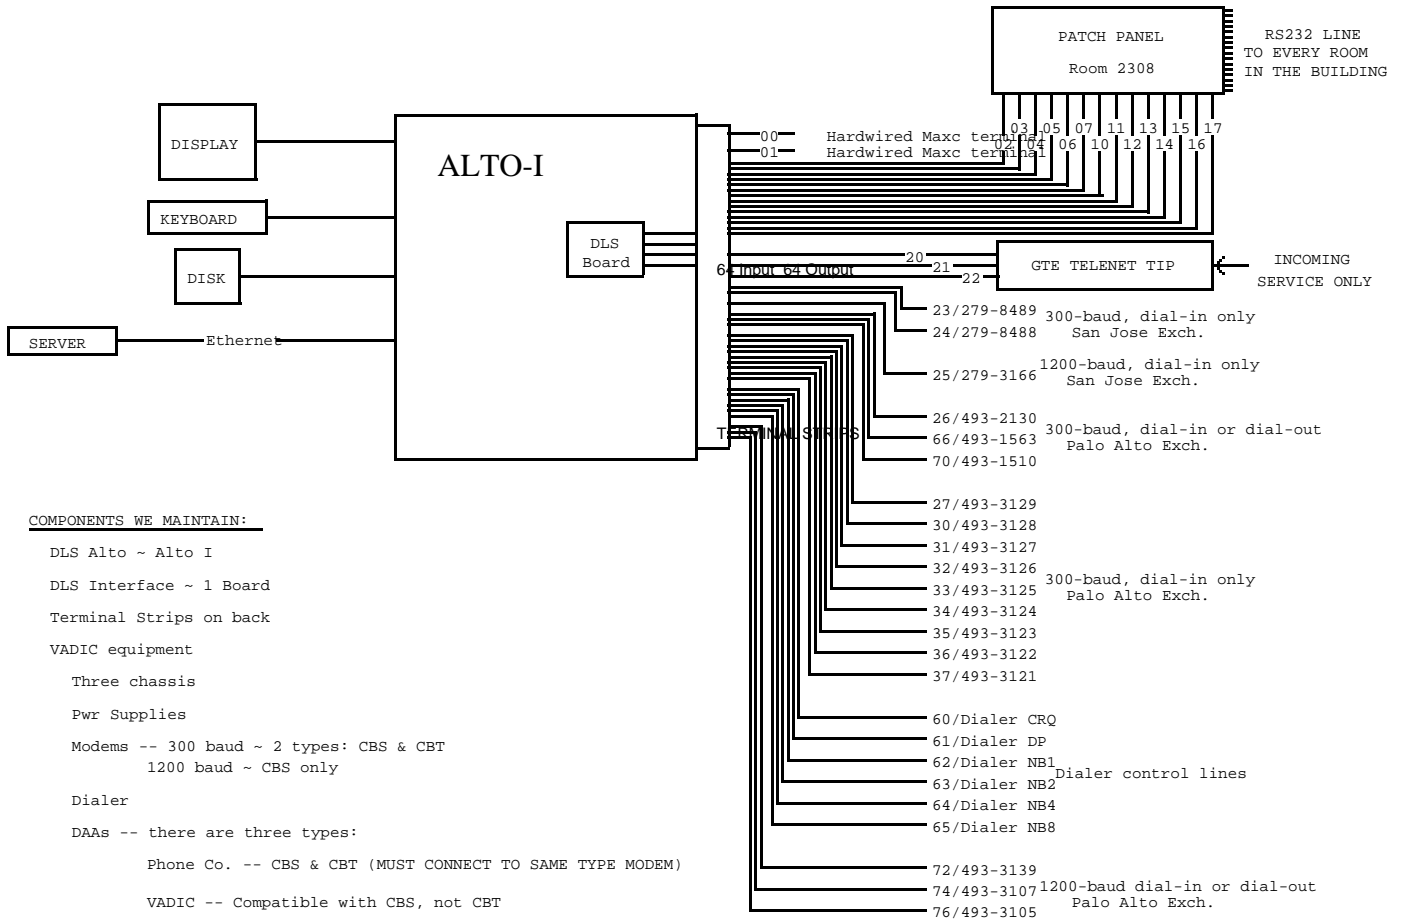


COMPONENTS WE MAINTAIN:

- DLS Alto ~ Alto I
- DLS Interface ~ 1 Board
- Terminal Strips on back
- VADIC equipment
 - Three chassis
 - Pwr Supplies
- Modems -- 300 baud ~ 2 types: CBS & CBT
 - 1200 baud ~ CBS only
- Dialer
- DAAs -- there are three types:
 - Phone Co. -- CBS & CBT (MUST CONNECT TO SAME TYPE MODEM)
 - VADIC -- Compatible with CBS, not CBT

TYPICAL DIAL-IN SERVICE

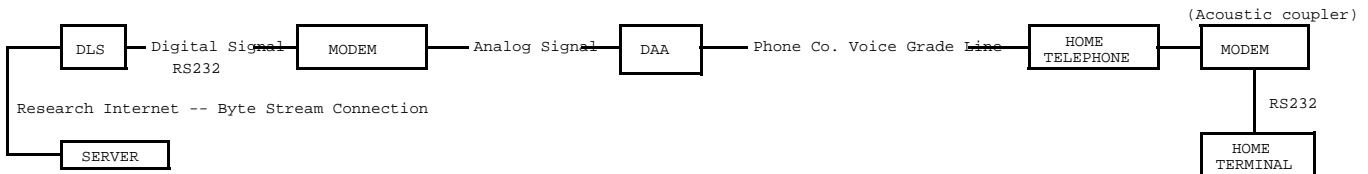

TYPICAL DIAL-OUT SERVICE

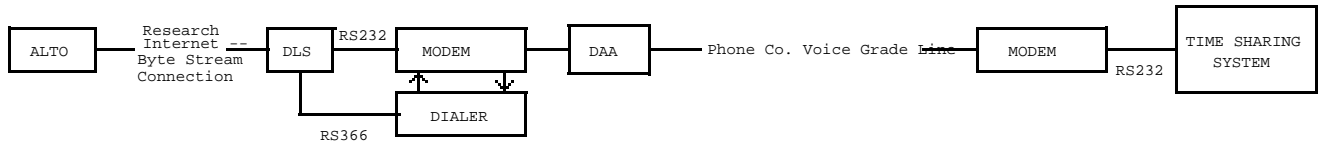

TIP = Terminal Interface Processor
DAA = Data Access Arrangement
DLS = Data Line Scanner
xx